


OFFICE OF THE MARION COUNTY SURVEYOR  
SECTION RECORD CORNER  
SECTION 21 TOWNSHIP 16 RANGE 4  
DATE: ---11-17-98--- 8-1-04  
PARTY CHIEF: Wilcoxen  
CREW: \_\_\_\_\_  
TYPE OF MARKER: Harrison  
METHOD OF ESTABLISHMENT: County: 4-30-92

IN. S.P.C. E ZONE, NAD 83  
NAME: 16042101  
N: 508232.0636(m)  
E: 62669.9152(m)

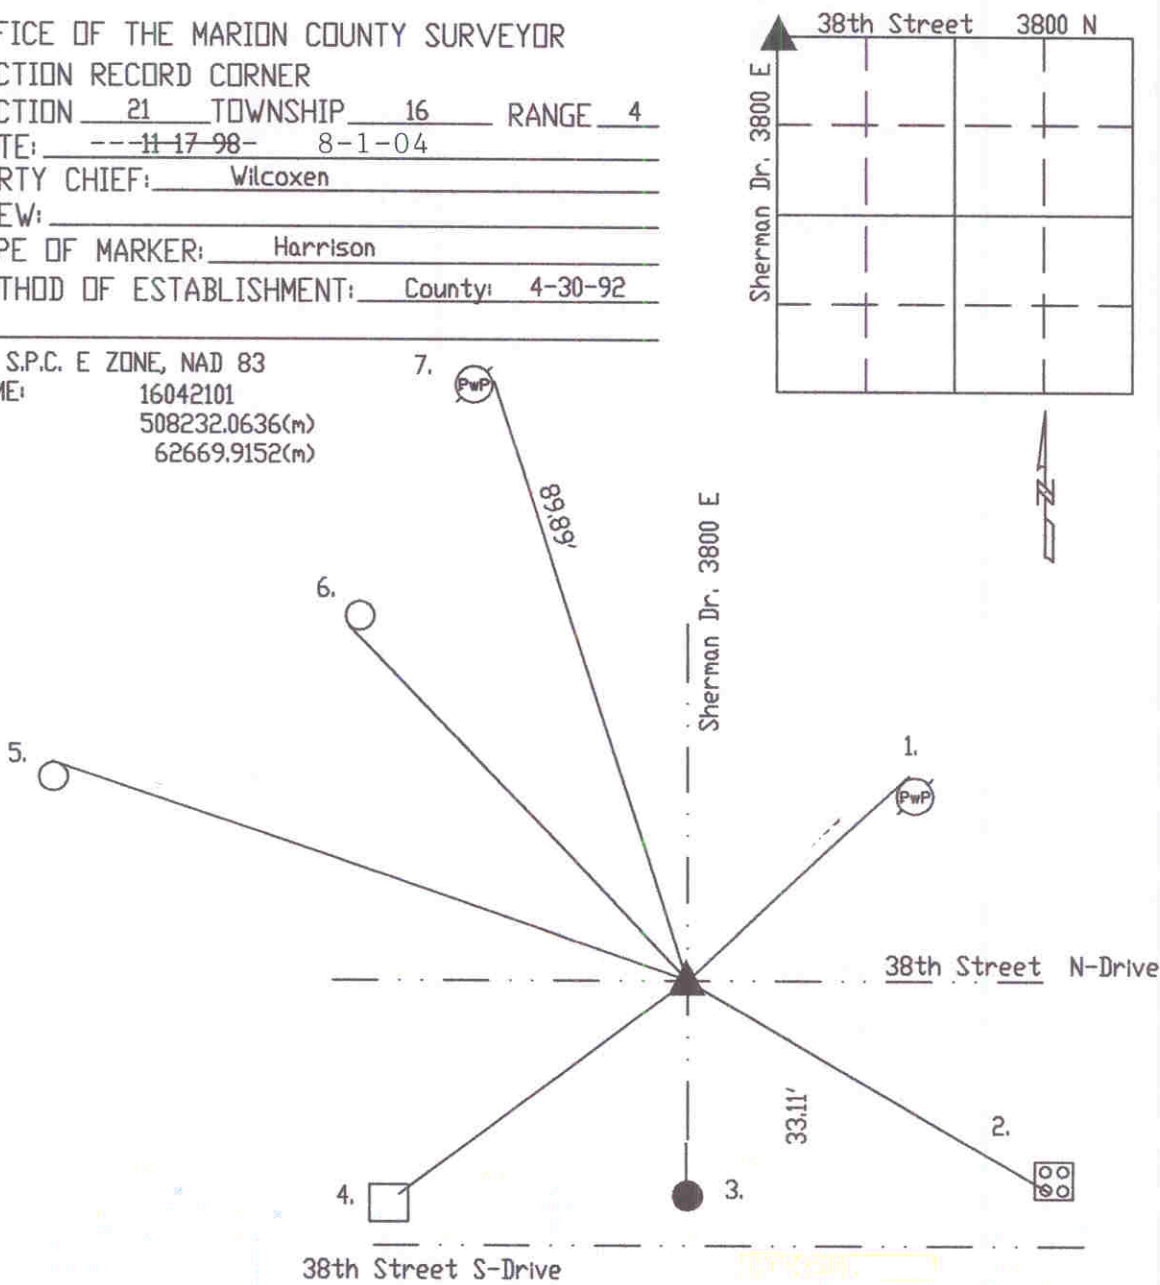

Original post set 1820 by John Hendricks with witnesses: 22" beech E 10 links, 14" dogwood S 77 W 9 links per Marion County Atlas pg. 11. Hosbrook 1820 called no stone but witnesses green per Center Township Legal Survey Book pg. 2. Percy Hosbrook 3-20-1854 called no stone but witnesses were correct per Center Township Legal Survey Book pg. 2. Miller 9-27-48 called a railroad spike. Monroe 7-1959 called same. G.W.S. 7-16-63 called same 3' down. SeFranka 2-6-70 called same. Wilcoxen 1-15-76 called same. Greene 5-22-86 called same. Wilcoxen 4-30-92 called same. Excavated by Wilcoxen 11-17-98 and railroad spike was found 2' down. A railroad spike in concrete was found 6' down. Harrison set. No stone was found during excavation.

HC642101

REF.	DISTANCE	DESCRIPTION
1.	38.92'	PK nail N PwP#1-412A 12'up
2.	51.23'	Cut 'x' SW-bolt light pole concrete base
3.	33.11'	Due S to railroad spike found
4.	36.16'	Cut 'x' NE <del>light pole 6'up</del> concrete base light pole
5.	88.11'	PK nail N light pole 6'up
6.	57.25'	PK nail SW light pole
7.	89.89'	PK nail E guide pole #377-411A 12'up